


DYE STEAMER

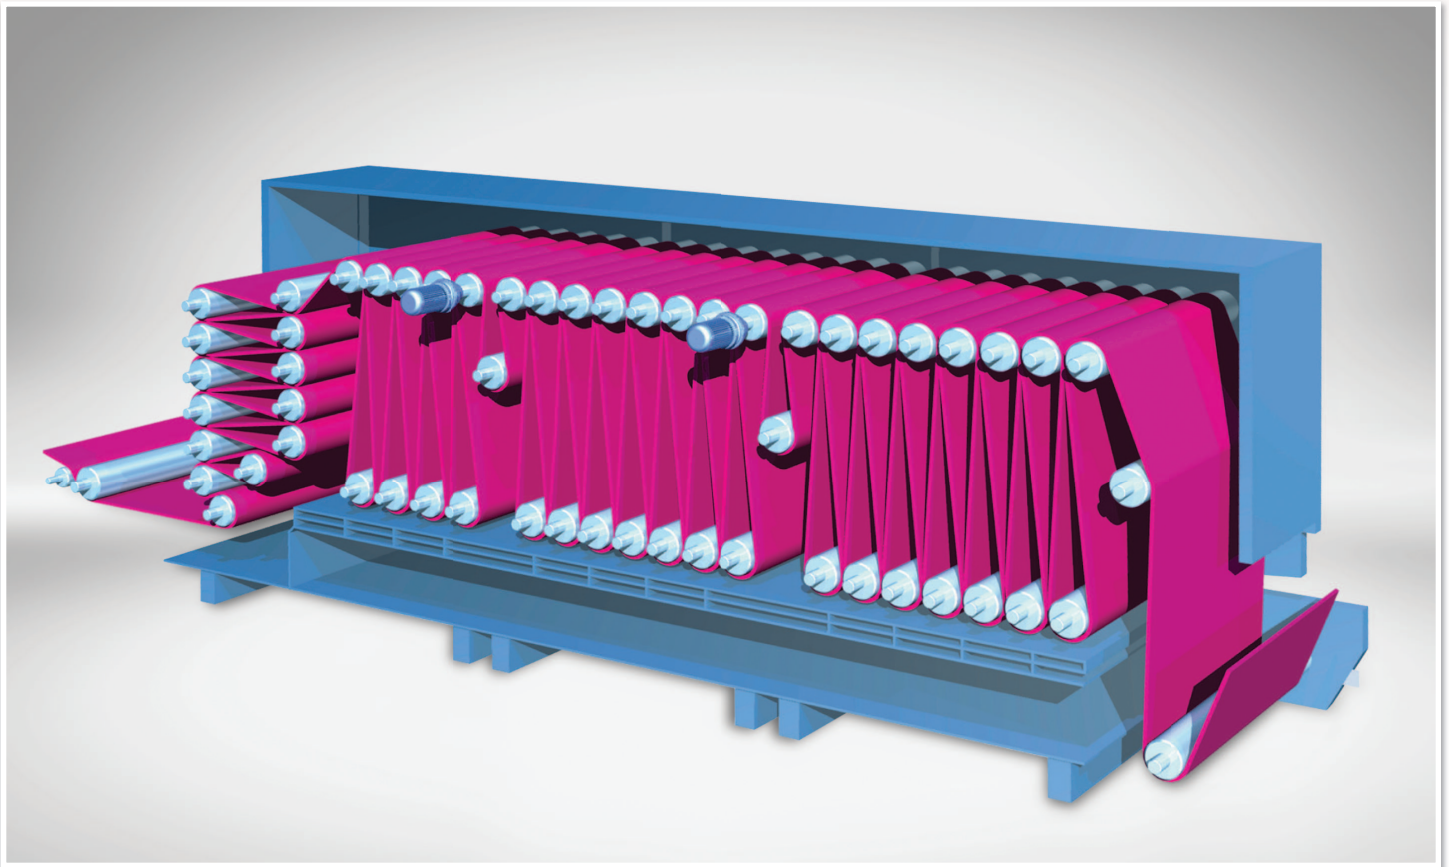

FEATURES

Specially designed entries/outlets to prevent air ingress and steam loss

Flat roof with indirect heating to eliminate condensation dripping

Water lock at steamer outlet / temperature-control and quick-cleaning optional

Optimized fabric guiding for level dyeing

Spray nozzles for quick cleaning


Housing in self-supporting segment construction with direct heating and level control



TEXTILE ■ NON-WOVEN

a division of KUSTERS ZIMA

TECHNICAL SPECS	
Working Width	900-3400 mm
Steam Consumption	250-800 kg/h
Fabric Content	42 m 60 m 78 m 96 m expendable in 18 m modules

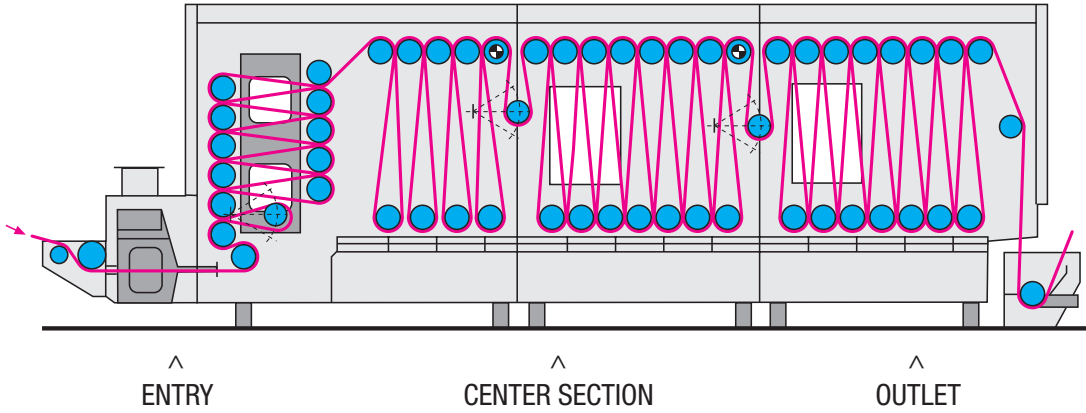

For more information call **864.576.0660** or visit **KustersZima.com/textile-non-woven**



TEXTILE ■ NON-WOVEN
a division of KUSTERS ZIMA